



Typenblatt Specification Sheet Fiche Technique

PEINER Schnellmontagekran SMK 201 Fast self erecting tower crane Grue à montage rapide

Max. Tragfähigkeit Lifting capacity Força de levage	2,0 t
Max. Ausladung Radius Portée	22 m
Max. Nutzlastmoment Load moment Couple de charge utile	226 kNm

"City-Kran"



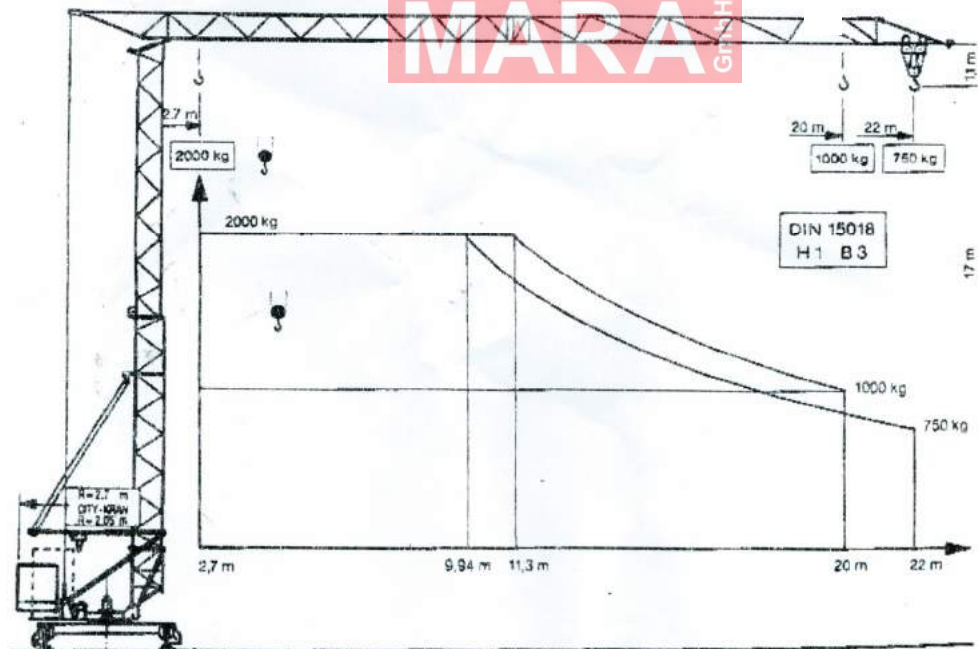





Stellstellung 20°



ZUTK Nr. 0622 + C €

PEINER Schnellmontagekran SMK 201
 Fast self erecting tower crane Form 20 (BGL)
 Grue à montage rapide City-Kran

Geschwindigkeiten / speeds / Vitesses

Type				m/min.	kg	Motor- Leistung Power Puissance KW
		40	1000			
PU B/2				20	2000	7,5
				5 m/min.		
KL 1/2		v = 30 m/min.				0,9
KL 1/3		v = 30 m/min. (Steilstellung 20° x 750 kg)				(1,8)
DIEO / 20		n = 0 → 0,9 min ⁻¹ SRA-System				1
380V / 50 Hz / 3 Ph		Anschlußwert / connection power / Puissance installée				10,5


Gewichte + Maße / weights and sizes / Poids et mesures

Konstruktionsgewicht Construction weight Poids de construction	kg	Standard	City-Ausf.			
		6500				
Gegengewicht Counterweight Contre-poids	kg	8300	10150	Kabeltrommel (Fahrweg) Cable winder (length of track) Enrouler (longueur de voie)	m	40
		CH + 2400 Zentralballast	2400 Zentralballast			
max. Eckdruck max. wheel load Pression max. par galot	KN	95		Kabelquerschnitt Cable cross section Section du câble	mm ²	4 x 6
Spurweite / Radstand track gauge / wheel gauge Ecartement de voie / Empâtement	m	3,6 / 3,6		Steuerkabel Control cable Câble de commande	m	15
Drehradius Radius of rotation Rayon de rotation	m	2,7	2,05	Schieneprofil Rail profile Profil de rail		S 33/S49

Straßentransport

Road transport

Transport en route

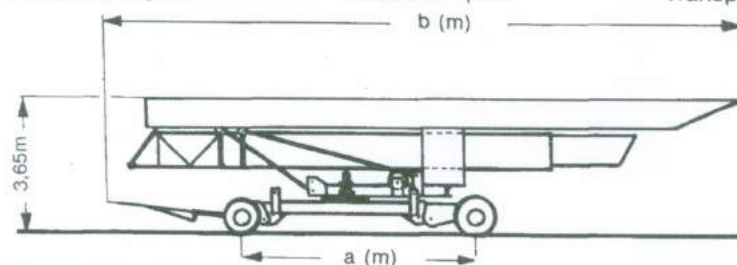

	a	b
KSL 14/1	5,78	14,60
KSL 20/1	6,03	14,40